

LIGHT CONTROL SENSOR

Model: SDVMF

INSTRUCTIONS FOR EXPLOITATION

The installation should be performed by a qualified electrician according to this manual.


Please keep the instructions.

PRODUCT CHARACTERISTICS

Power supply:	220V-240V AC, 50-60Hz
Rated current:	6A
Ambient Light:	<5-15lx
Working temperature range:	-20°C +40°C
Working humidity:	< 93%RH
Index of protection:	IP44

NOTES AND INFORMATION

The light control sensor SDVMF monitors the ambient

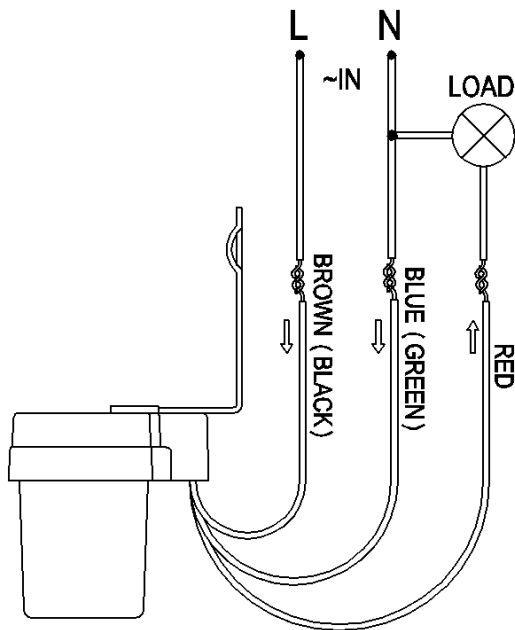

light of the controlled area and, depending on the light, the sensor turns on/off the load automatically. The ambient temperature and humidity cannot affect the proper work of the sensor. This sensor is appropriate for automation of street and garden lighting, which works only at night.

SAFETY INSTRUCTIONS

Any action performed when the main power supply is on has a risk of electrical shock. The power supply must be turned off prior to installation. The max. load should not be exceeded. The sensor should be installed in a vertical position on still surfaces.

INSTALLATION

Switch off the power supply. Connect the wire as per the following figure. Please install the sensor following the direction shown on the metal bracket and according to the correct installation place with the included inflated screws.


TESTING THE SENSOR

Switch on the power supply. If you test the sensor during the day, cover the detection window of the photocell to simulate night and the lamp will turn on. When you uncover the detection window of the photocell it will turn the lamp off automatically.

NOTE

There should be no obstruction blocking the natural light in front of the sensor. No swaying objects have to fall into the detection range of the sensor. The sensor should not be installed in the range of other lighting sources.

TAKING CARE OF THE NATURAL ENVIRONMENT CLEANLINESS:

- The product and its components are not harmful to the environment
 - Please dispose the package elements separately in containers for the corresponding material.
-  Please dispose the broken product separately in containers for out of usage electrical equipment.